

## 4 Way Diverter Valves Series "D"



Pneumatic actuated  
4 way diverter valve  
for vacuum or low  
pressure\* conveying  
systems.

Available in Sizes  
from 2" up to 8"

**Inlets & Outlets available in Tube & Pipe Sizes  
in Stainless Steel, Aluminum & Carbon Steel**


\*(Dilute phase up to 15 psig max)

### Standard Features

- Positive Blade Lock (PBL) Between Blade & Cylinder Rod.
- Internal Magnetic Piston, Cushioned Air Cylinder.
  - Active Compression Seal (ACS).
  - Polished Stainless Steel Blade.
- Light Weight Aluminum Body Construction.
- Temperature Rated for up to 82°C (180°F).
- Double Acting or Single Acting Spring Return Solenoid or Manual Lever Valve.
  - NEMA 4 Watertight & Dust Tight Electrics.
- Wall Thicknesses of 16, 14 & 11 Gauge, Schedule 10, 40 & 80.
  - Fully Tested Prior to Shipping.

**We deliver what we promise on time every time!**

## 4 Way Diverter Valves Series "D"

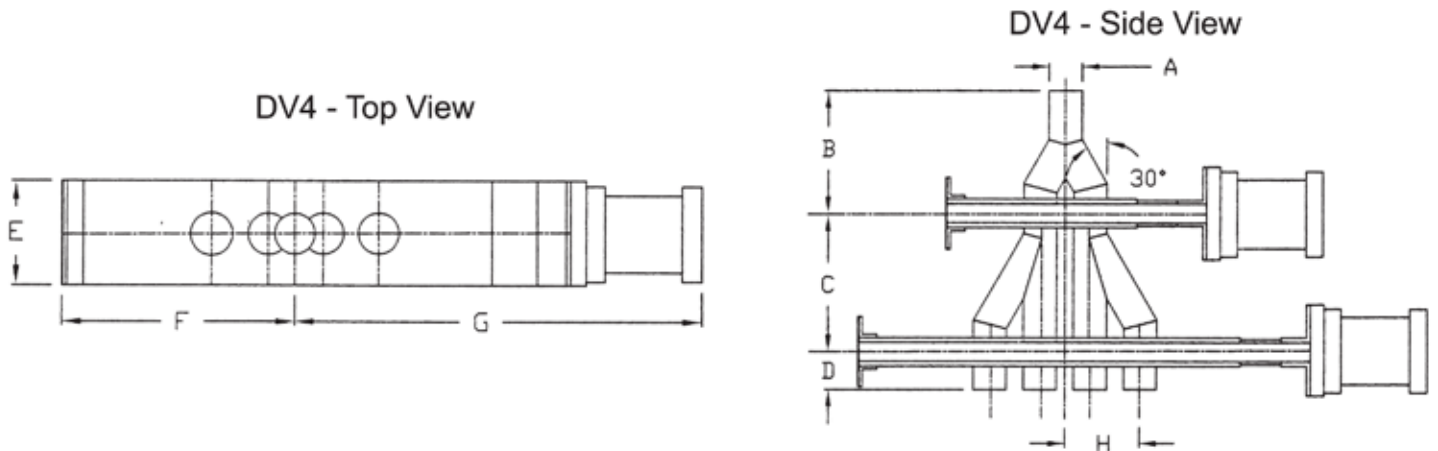

Model number	Size A	B	C	D	E	F	G	H
DV4-200	2	7½	8	4	5	8	17½	3¾
DV4-2375	2⅜	10	10	5	6	11	21½	5¼
DV4-250	2½	8	10	5	6	11	21½	5¼
DV4-2875	2⅞	10	10	5	6	11	21½	5¼
DV4-300	3	8½	10	4	6	11	21½	5¼
DV4-350	3½	12½	13	6	7	15½	28½	7½
DV4-400	4	10½	13	4	7	15½	28½	7½
DV4-450	4½	13½	15½	6	9	19¾	34½	9
DV4-500	5	12¾	15½	5	9	19¾	34½	9
DV4-5563	5 <sup>9/16</sup>	14¾	18¼	6	10	21¾	38	10½
DV4-600	6	14¾	18¼	5	10	21¾	38	10½
DV4-6625	6 <sup>5/8</sup>	15½	16½	7	11	21¾	48¼	15
DV4-800	8	19	18½	9	12	30¼	48¼	15

### Options

- Position Switches 5 Volt to 220 Volt
- AC/DC.Prewired Terminal Boxes.
- Oversized Air Cylinders.
- Valve Body Sealed for Air Purging.
- Inlets/Outlets - Straight or Flanged Ends.
- Manual Hand Wheel Operation.
- Electric Actuator.
- Solenoids 110 Volt AC or 24 Volt DC.
- NEMA 7-9 Hazardous Locations.  
(Class I, Groups B, C&D, Class II, Groups E, F, & G).
- High Temperature Modifications.

We deliver what we promise on time every time!