


Universal VAC Valve

Gravity flow or vacuum systems only
up to 15"/Hg-1MPa







Sizes 3" up to 6"
75mm to 150mm

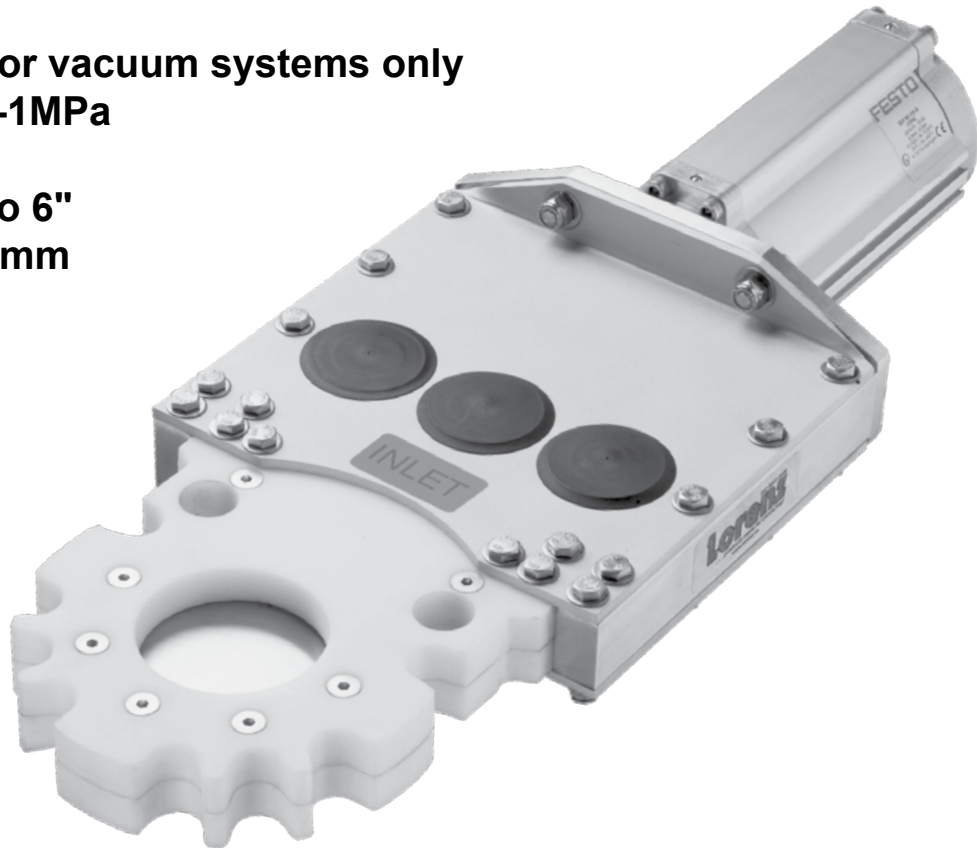

Standard Features

- Connections - ANSI, DIN, JIS bolt patterns
- Temperature rated for up to 82°C (180°F)
- Stainless steel blade • Aluminium body construction
- Polymer flanges • Braided Teflon seal

Universal VAC Valve

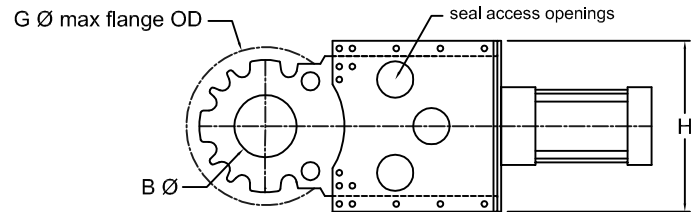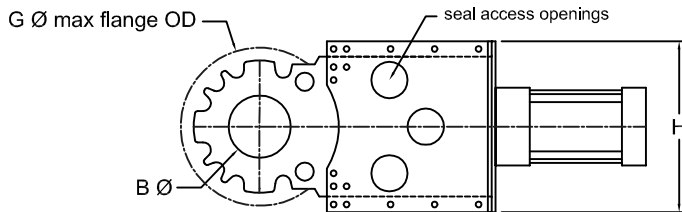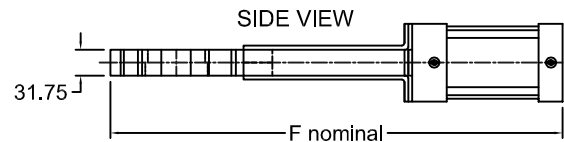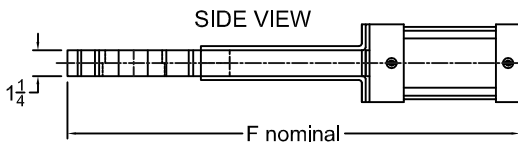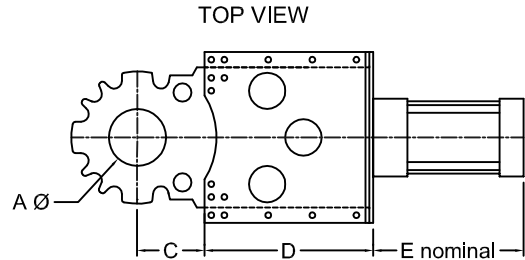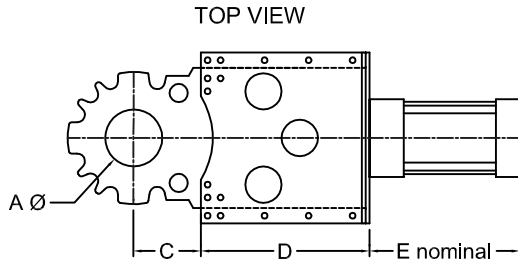

IMPERIAL

Model Number	A DIA	B DIA	C	D	E	F	G DIA	H
VGR-0275	2 3/4"	3	3 1/4	8 1/8	7 1/4	21 13/16	7 5/8	8 1/4
VGR-0375	3 3/4"	4	3 1/4	10 5/8	8 1/4	26 1/4	9	11
VGR-0475	4 3/4"	5	3 3/4	12	10	30 1/8	10 1/2	12
VGR-0575	5 3/4"	6	4 1/4	13	11	33 1/8	11 1/2	13

METRIC

Model Number	A DIA	B DIA	C	D	E	F	G DIA	H
VGR-75	70	76.2	83	206	184	554	194	210
VGR-100	95	101.6	83	270	210	667	229	279
VGR-125	121	127	95	305	254	765	267	305
VGR-150	146	152.4	108	330	279	841	292	330

Options

- Double action or single acting solenoids • Position switches 5 volt to 220 volt AC/DC
- Filter/regulator, vented ball valve, mufflers • Pre-wired terminal box (PVC)